


# 12" Air Core Drill 3-Speed, 3.8 HP Motor

## Model 2 1328 0050 SA

The 2 1328 0050 Core Drill combines a powerful 3.8 HP motor with a rugged 3-speed gearbox to drill holes from 1/2" to 12" diameter. Ideal for heavy-duty drilling in concrete, reinforced concrete, asphalt, natural stone and refractory. No other drill in its class is so light and powerful.

### Features and Benefits:

- High-torque 3-speed gearbox for optimal drilling speeds: 300-700-1350 RPM
- 1" to 12" bit capacity
- Heat-treated gears for long life
- Mechanical Slip Clutch protects in case of jamming
- 43" tall drill stand with Quick Lock Motor Mount, positive locking knob and wheels
- Hand-crank can be mounted on either side of the drill stand. The stand angle is adjustable up to 45°
- Built-in Water Swivel
- 1-1/4" x 7 UNC Spindle
- 5/8" x 11 UNC Adapter (optional)

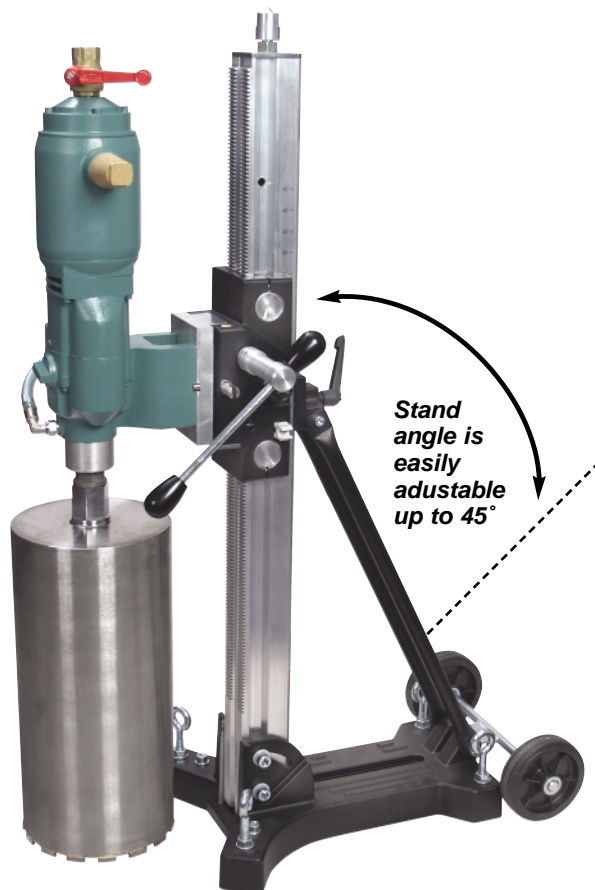

Stand angle is easily adjustable up to 45°

**Rig-mounted Air Drill with Anchor Stand  
Only 66 lbs.**

Model 2 1328 0050 SA	
3 Speeds (RPM)	300, 700, 1350
Air Motor	3.8 HP (2.8 kW)
Air Consumption	123 CFM
Air Pressure	90 PSI
Air Connection	3/4" NPT
Bit Connection	1-1/4"x7 UNC, 5/8"x11 UNC*, G 1/2"
Weight	66 lbs. (includes motor and drill stand)

\* **Optional**

*Note: Specifications subject to change. Refer to Owner's Manual for operating instructions.*

### Core Drill with Anchor Stand

Model No. 2 1328 0050 SA

Weight: 66 lbs.

### Core Drill with Combo Stand & Pneumatic Vacuum Pump

Model No. 2 1328 0050 SV

Weight: 72 lbs.



**Air Core Drill Motor  
P/N 2 1328 0050**

## CS UNITEC, Inc.

22 Harbor Avenue, Norwalk, CT 06850

Toll Free: (800) 700-5919 Tel: (203) 853-9522 Fax: (203) 853-9921

Website: www.csunitec.com E-Mail: info@csunitec.com