


6" Air Core Drills 3-Speed, 2.1 or 3.8 HP Motor Hand-held or Rig-mounted

Ideal for drilling holes in walls, floors, ceilings, refractory brick and for all concrete anchoring systems. Two models, 2.1 or 3.8 HP.

Drilling Capacity:

- Hand-held Drilling 1/2" – 3" dia.
 - Rig-mounted Drilling 1/2" – 6" dia.*
- *Do not use core bits larger than 6" diameter
Use gear 1 in a drill stand only.*

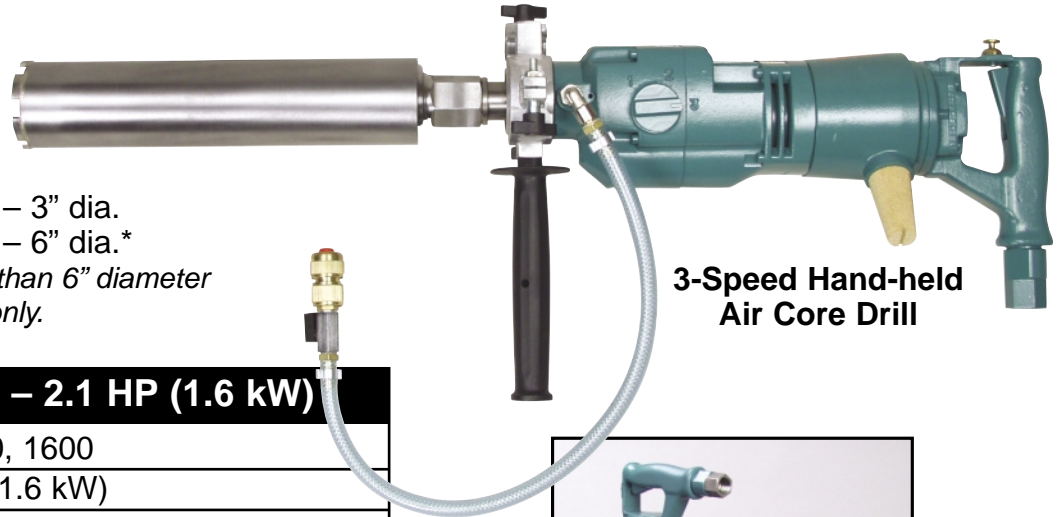

**3-Speed Hand-held
Air Core Drill**

Model 2 1333 0010 – 2.1 HP (1.6 kW)	
3 Speeds (RPM)	400, 900, 1600
Air Motor	2.1 HP (1.6 kW)
Air Consumption	77 CFM
Air Pressure	90 PSI
Air Connection	3/4" NPT
Bit Connection	1-1/4"x7 UNC, 5/8"x11 UNC, G 1/2"
Weight	18 lbs.

*Drill & Anchor Stand – 2 1333 0010 SA (49 lbs.)
Drill, Stand & Vacuum Pump – 2 1333 0010 SV (51 lbs.)*

Model 2 1335 0010 – 3.8 HP (2.8 kW)	
3 Speeds (RPM)	300, 700, 1350
Air Motor	3.8 HP (2.8 kW)
Air Consumption	123 CFM
Air Pressure	90 PSI
Air Connection	3/4" NPT
Bit Connection	1-1/4"x7 UNC, 5/8"x11 UNC, G 1/2"
Weight	21 lbs.

*Drill & Anchor Stand – 2 1335 0010 SA (52 lbs.)
Drill, Stand & Vacuum Pump – 2 1335 0010 SV (54 lbs.)*



**Rig-mounted Air Drill
Only 52 lbs.**

(Hand crank can be mounted on either side)

Standard Equipment:

- Safety Slip Clutch
- 3-Speed Mechanical Gear Box with heat-treated gears
- Built-in Water Swivel
- 1-1/4" x 7 UNC Spindle
- 5/8" x 11 UNC Adapter
- 360° Rotatable Side Handle
- Centering Aid P/N 2 1315 6800

Optional Accessories:

- Metal Carrying Case P/N 5 1212 9000
- Anchor Stand P/N BST 162V
- Vacuum Pump, Pneumatic P/N 253.542
- Portable Water Tank, 3.5 gallons P/N 251.623
- Unicore Wet Diamond Core Bits

Note: Specifications subject to change. Refer to Owner's Manual for operating instructions.

CS UNITEC, Inc.

22 Harbor Avenue, Norwalk, CT 06850
Toll Free: (800) 700-5919 Tel: (203) 853-9522 Fax: (203) 853-9921
Website: www.csunitec.com E-Mail: info@csunitec.com