

Jackhammer Trolley JHT



OPERATOR'S MANUAL

CONTENTS

ABOUT	THIS MANUAL	2
-	Key Terms	2
-	Disclaimer	3
PRODU	ICT INFORMATION	4
-	Safety Information	4
	o General Safety Instructions	4
	o Safety Stickers	5-6
-	Warranty	7-10
-	Product Description and Specifications	12-13
INSTRU	JCTIONS FOR USE	14
-	STEP 1 – Fitting A Jack Hammer	14-17
-	STEP 2 – Using the Hammer Trolley	17-18
-	STEP 3 – Servicing the Hammer Trolley	19
APPEN	DIX	20-26
A.	JHT PARTS BREAKDOWN	
B.	BLOCK SETS BREAKDOWN	
C.	HAZARD ASSESSMENT	
D.	SALES AND SPARES	
E.	JACK HAMMER MANUAL (WHEN PURCHASED)	

ABOUT THIS MANUAL

This manual is designed to provide the user with the information required to operate and maintain the Jack Hammer Trolley correctly and safely.

Key Terms



READ CAREFULLY – refers to **important information** that should be paid careful attention.



CAUTION - indicates a situation that **may** cause injury or damage to the machine if the user does not follow the instructions.



WARNING – indicates a situation that **may** cause injury or death if the user does not follow the instructions correctly.



DANGER – indicates a situation that **will** cause injury or death if the user does not follow the instructions as written.



PROHIBITED – identifies actions that **should never** be carried out by any one interacting with the machine.

Disclaimer

MAKINEX, and its affiliates, takes no responsibility for any damage, injury or death resulting from the incorrect or unsafe use of this machine. Use of this machine should be undertaken by competent persons only. It is the operators' responsibility to ensure that the following safety procedures are followed.

PRODUCT INFORMATION

Safety Information

General Safety Instructions

Throughout this document there are several safety warnings. The user should read through this complete document before using the Jack Hammer Trolley.



Ensure you read all information contained in this manual before using the Jack Hammer Trolley



Ensure you read the manual and safety instructions for the Jack Hammer and other components that are part of this unit. See Appendix for more information



Always wear the recommended personal protective equipment



Never expose the machine to moisture or rain

Safety Stickers

There is a safety and information panel provided on the front of the Jack Hammer Trolley to alert the user of potential safety risks/hazards. Please read and adhere to all instructions on the Unit.



It is forbidden to remove any safety or instructional stickers or panels from the Jack Hammer Trolley



Read all safety and instructional stickers displayed on each component of the Jack Hammer Trolley

MAKINEX CONSTRUCTION PRODUCTS

Jackhammer Trolley - JHT

SAFETY OPERATING INSTRUCTIONS

- Ensure jackhammer is switched off before plugging in or disconnecting from mains power
- Ensure machine is always grounded
- Use a dedicated mains power supply with extension lead not exceeding 10 metres/ 11 yards
- Use caution when changing attachments
- Take regular breaks to avoid personal injury, stress, strain and fatigue

makinex.com

Designed in Australia | Made in China US Patent No.s D668420 & 8240682



















Warranty

In order to take advantage of the MAKINEX limited warranty, you must have maintenance performed according to the schedule (contained in relevant owner's manual supplied with this product), by an authorised MAKINEX dealer or MAKINEX service technician. You are free to have your MAKINEX product serviced by any suitably qualified mechanic or electrician (depending on the mechanical or electrical requirement) and this will not affect your statutory warranties, however, failure by the owner to have the recommended servicing carried out by an authorised MAKINEX dealer/service technician means that you cannot take advantage of the MAKINEX limited warranty.

In order to ensure your safety, we strongly recommend that you only use an authorised MAKINEX dealer for servicing. Only authorised MAKINEX dealers have access to all the special tools, technical information, parts and training required to maintain your MAKINEX product in peak operating condition.

MAKINEX warrants each new Jack hammer Trolley to be free from defects in material and workmanship under normal domestic and industrial use and service for the period specified below, conditional to the limitations and exclusions printed on this page. This warranty applies only to new MAKINEX Jack hammer Trolleys distributed by us and by our authorised MAKINEX dealers.

You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

WARRANTY: (Ex-factory/ Reseller premise)

MAKINEX warrants to the original purchaser:

- MAKINEX provides a Limited One Year Warranty that applies to Jack Hammer Trolley only (this excludes the Jack Hammer and any other attachments and consumables).
- Any unauthorized repair or part replacement will void warranty. Refer to manufacturer for all repairs.
- Regular service must be carried out by competent persons only; failure to comply will void warranty.
- Jack Hammer (where purchased) is to be covered by original manufacturer. Please refer to their manual for more information.

Transportation charges on product submitted for repair or replacement under this warranty are the sole responsibility o+-f the purchaser. This warranty only applies to the original purchaser and is not transferable.

Warranty Exclusions:

- Warranty does not cover wear and tear, breakage, misuse or theft.
- Warranty does not cover consumables (e.g. blades).
 Warranty does not cover attachments (e.g. Shanks and Tile Smasher heads).
- Warranty will not apply to parts and/or labour if this Jack hammer Trolley is deemed to be misused, neglected, installed improperly or set up incorrectly.

Warranty Exclusions

- Cosmetic defects such as decals and coating.
- Failures due to acts of God and other force majeure events beyond the manufacturer's control.
- Problems caused by parts that are not original MAKINEX parts.

Responsibility of the consumer under this Limited Warranty:

- Strict adherence to the maintenance checks and schedule with proof of scheduled maintenance service required by an authorised agent or qualified mechanic.
- Maintenance services are not covered under warranty.
- It is the consumer's responsibility to deliver the machine in question to our service premises or to the premises of our appointed agent at the consumer's expense for replacement or repair as applicable.

Claim Procedure:

- Contact MAKINEX by phone or email informing us of your machines problem or defect.
- Once the extent of the claim has been assessed, we retain the right to compensate the consumer for such defect, or repair (parts & labour), or replace the machine under warranty.
- All warranties will be carried out by MAKINEX authorised staff or appointed agents at a premises to be determined by the Manufacturer.
- It is the responsibility (and cost) of MAKINEX or our appointed agent to return the machine to be repaired or replaced under warranty to the consumer- this is valid for domestic territories only (e.g. machine purchased in USA will repaired/replaced under warranty and returned to the USA consumer. Machine purchased in Australia will be repaired/ or replaced under warranty and returned to the Australian consumer etc.)

- Where the specific warranty component (e.g. Jack hammer) is under a Manufacturer's warranty other than MAKINEX (e.g. Bosch, Hitachi, Makita, Hilti etc), the consumer can either contact MAKINEX or the applicable Manufacturer for repairs where such warranty was registered with that manufacturer at purchase.
- Warranty calls will only be carried out by our representatives and not via client's choice of repairer. We will not accept back charges for any work not carried out by our representatives, or accept any charges due to equipment being un-operational for any reason even during its warranty period.

WARRANTY CONTACT INFORMATION: AUSTRALIA

Tel + 61 2 9460 8071 Fax +61 2 9439 9815

15 Waltham St, Artarmon, NSW 2064 AUSTRALIA

USA Tel 407-446-1966

EUROPE

Tel +31 (0)6 24881203 +31 (0)6 50841849

SERVICE & PART ORDERING

For service and ordering parts, please call **USA:** 800-709-0002

Product Description and Specifications

The versatile Jackhammer Trolley packs a punch, saving you a lot of hard work and effort. Let the Jackhammer Trolley take the workload of your back!

No more struggling or bending trying to handle heavy hammers, the trolley takes the pain out of demolition and renovation.

The Jackhammer Trolley enables your demolition hammer to lifts most types of linoleum and tile, break rocks and blocks, crack concrete and sandstone all with a minimum of effort.

With a wide range of angle the Jack Hammer Trolley adapts to any situation with a maximum leverage.

Features

- Durable zinc coated frame
- Angle adjustment with huge angle range
- Choice of popular brand hammers, will suit most hammers
- Anti-vibration ergonomic design
- Large wheels

TABLE 2: Product Specifications

HEIGHT WHEN RAISED	1100mm/43.3"		
HEIGHT WHEN LOWERED	600mm/23.6"		
OVERALL WIDTH	510mm/20"		
OVERALL LENGTH	1100mm/43.3"		
ANGLE OF ADJUSTMENT	73° (93° closed, 20° open)		
WEIGHT (WITHOUT JACKHAMMER)	28kg/62lb		

INSTRUCTIONS FOR USE



Do not operate the Jack Hammer without wearing the appropriate personal protective equipment and assessing the surrounding area for hazards.

STEP 1 – Fitting a Jack Hammer


Tools Required

- 17mm socket
- 19mm socket
- Shifter

- Phillips head screwdriver
- Pliers


Instructions

1. You should have the parts pictured below:

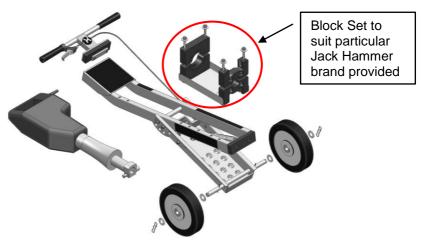


Jackhammer sold separately

2. Attach the handle to the frame with the two mounting bolts provided.

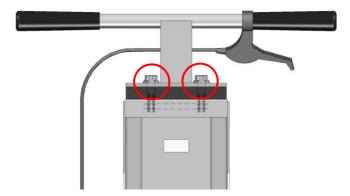


3. NOTE - for Block Set details refer to APPENDIX B.


Lower trolley to its lowest position and support the end to hold the frame level, then place the base blocks on the frame. Place the jackhammer on top of the base blocks. Ensure the attachment lock on the jackhammer is facing out, as shown on the picture below:

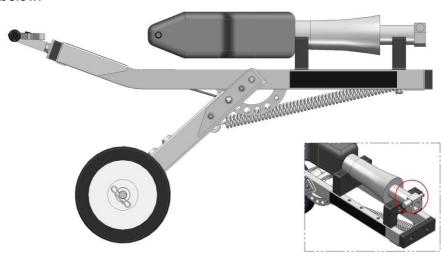


4. Place top blocks and the cover plate on top of the jackhammer and tighten the supplied bolts until they are snug.

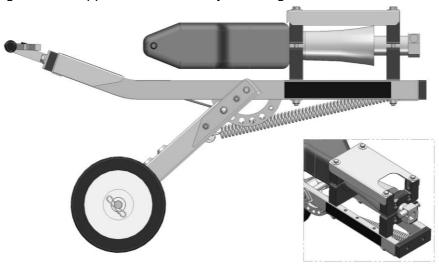

5. Mount the jackhammer shank, see jackhammer user manual for details

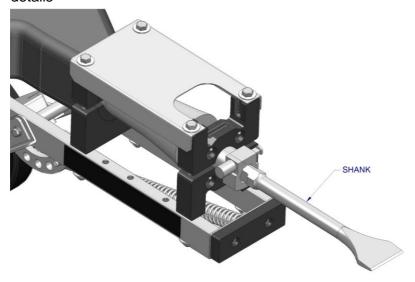

Brake Lever Adjustment

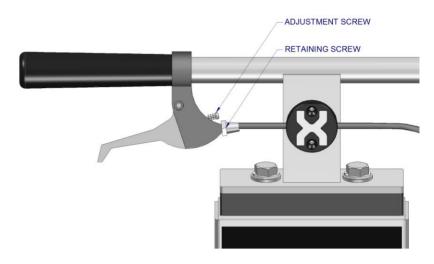

Instructions

- 1. Ensure cable is not kinked anywhere along its length
- 2. Tighten retaining screw with pliers
- Tighten adjustment screw to remove slack from the cable. Note that some slack in the mechanism is normal.

STEP 2 – Using the Hammer Trolley



Ensure the machine is switched OFF before plugging in



Ensure Moil is correctly inserted and locked in position before use

- 1. Ensure Hammer is secure in clamping mechanism and cannot rotate.
- 2. Position and angle before commencing work.

To change angle - lift handles to take weight off lock mechanism then pull the brake lever to disengage the lock mechanism. Lift or lower the height of the handles to achieve the desired angle of jackhammer then release brake lever to reengage the lock mechanism.

- 3. Never allow Hammer or moil to overheat.
- 4. Switch on with trigger
- 5. Lock into position with trigger lock
- 6. Refer to Hammer Instruction Manual for more detail on operation and service



Always switch off machine before unplugging


STEP 3 – Servicing the Hammer Trolley

Every Use:

- Inspect frame for damage
- Ensure bolts are secure

Every 6 Months:

- Adjust brake lever to eliminate free-play
 - See page 13 for details
- Lubricate brake lever cable
 - Drip oil from the top of the cable so it runs through the cable housing
 - Use light weight oil; grease or heavy oil will clog the cable housings
- Grease the pivot axle
 - Use a grease gun and apply grease until excess starts to leak out. See picture below for location of grease nipple:

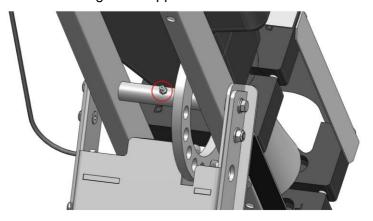


APPENDICES


- A. JACK HAMMER TROLLEY PARTS BREAK DOWN
- B. BLOCK SETS BREAKDOWN
- C. JACK HAMMER TROLLEY HAZARD ASSESSMENT
- D. BLOCK SET PART SELECTION DETAILS
- E. SALES AND SPARES
- F. JACK HAMMER MANUAL (WHEN PURCHASED)

Appendix A – JHT PARTS BREAKDOWN

	Document Number	Title	Quantity	#	Document Number	Title	Quant
1		M8 SPRING WASHER	3	33	JHT-99-21	M12 SPRING PLUNGER	1
2		M8 HEX NUT	2	34	JHT-99-42	COTTER SPLIT PIN	4
3		M12x50 HEX HEAD BOLT	2	35	JHT-99-61	HANDLE GRIP	2
4		M12 WASHER	2	36	JHT-99-62	HANDLE END PLUG	2
5		M12 SPRING WASHER	2	37	JHT-99-63	BRAKE LEVER & CABLE	1
6		M4x12 COUNTERSUNK BOLT	2	38	JHT-99-81	R-CLIP	1
7		GREASE NIPPLE	1				
8		M20 NYLON WASHER	6				
9		M8 HEX NUT NYLOC	6				
0		M8x25 HEX HEAD BOLT	2				
1		M8x20 CSK SOCKET SCREW	4		(35)	36) 25)	
2		M8x35mm CSK POZI	2		7	r r	
3		M8 PLAIN FLAT WASHER	6		//		
4	JHT-01-01	TENSION SPRING	1	6	\n\	/	(
5	JHT-02-01	RESTING BLOCK	1	0	NO.		
6	JHT-02-02	SPRING BRACKET	1	24)	/)		
7	JHT-03-00	MAIN FRAME WELDMENT	1	(37)_			/
8	JHT-04-01	PIVOT AXLE	1			~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	
9	JHT-04-02	BOLT HOLDER	2		5		
0	JHT-04-21	BOLT HOLDER BENT	1				20 ~
1	JHT-05-00	BASE FRAME WELDMENT	1				
2	JHT-06-01	HANDLE BUFFER	1			Circle of the Control	
3	JHT-06-02	HANDLE NUTBAR	1				
4	JHT-06-03	'X' CABLE RETAINER CLIP	1		/	// ///	`
5	JHT-07-00	HANDLE FRAME WELDMENT	1		1	// //	
6	JHT-08-01	LOWERING CABLE	1		/ /7	→ /	
7	JHT-08-02	LOWERING PIN	1		Q /%		(
8	JHT-08-03	SMALL SPRING	1		194	77 //	
29	JHT-99-11	STICKER SET - JHT	1		///	7///	
0	JHT-99-15	WHEEL	2		N/	M / II	(
1	JHT-99-16	WHEEL BUSH	4	/		//_	
2	JHT-99-17	10mm DIA ANCHOR SHACKLE - 1T	1		mg //		
				V /<	S49//		
		(33)———					//
		NEVER DARK FOR DETAIL O	1	97 N	V44:6419		_
		ENEXT PAGE FOR DETAILS BRAKE LEVER AND PIN PARTS	/%	/ 1	1/2//2//	1000	
			/9//		X / 194		(
		(14)	_///		/W \/	11 / 11/2	
			L9 / A	9	Alex	11 / 1/2	(
		9	/o// /	// //	$\Psi/\!\!/$		$\overline{}$
		(16) Z		[/~	T/	W Sold	
~k	CHAMM	ER TROLLEY ~		7	/ /	-00 //	J) '
or	C I IPAIVIIVI	LK IKOLLLI		/ /	/	1 // //	$\mathfrak{A}H$.
7	JAK	INEX II	1	/	/	1///6	9/6
					/		//७
	ex Support #:						

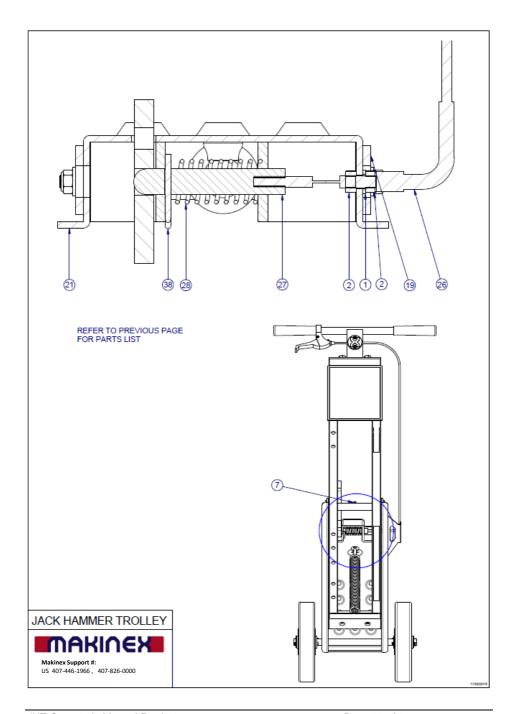

Appendix B - BLOCK SETS BREAK DOWN

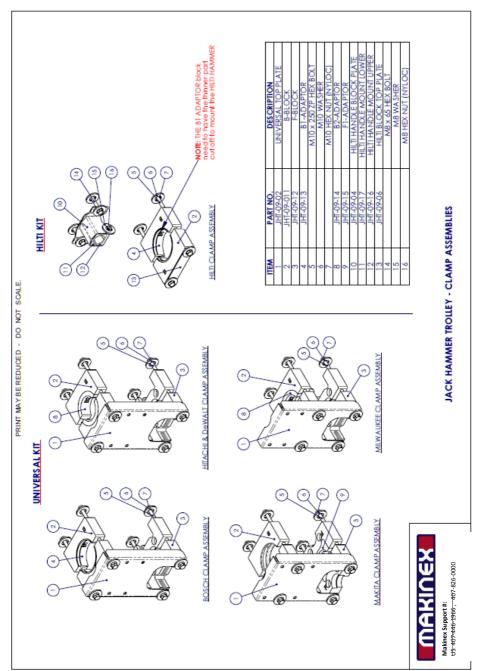

INSTRUCTIONS TO USE HOIST OR TWO PEOPLE TO LIFT MACHINE INSTRUCTIONS TO WEAR APPROPRIATE PROTECTIVE FOOTWARE INSTRUCTIONS OF SAFE OPERATION OF LEVER INSTRUCTIONS TO USE HOIST OR TWO PEOPLE TO LIFT MACHINE NSTRUCTIONS ON SAFE OPERATION OF LOWERING MECHANISM INSTRUCTIONS TO WEAR APPROPRIATE PROTECTIVE MASK INSTRUCTIONS TO WEAR APPROPRIATE PROTECTIVE GOGGLES NSTRUCTIONS TO WEAR APPROPRIATE PROTECTIVE GLOVES NSTRUCTIONS TO WEAR APPROPRIATE PROTECTIVE GLOVES PLACE SIGNS TO RECOMMEND HEARING PROTECTION Assessment Carried Out By: RORY KENNARD MIRES COATED, PROTECTED AND SECURED POINTS OF VIBRATION ABSORBTION Document Revision Number: 3 MATERIALS ARE NOT HAZARDOUS HANDLES INSULATED PRODUCT RISK / HAZARD ASSESSMENT TABLE Date: 25.10.2010 RISK LEVEL NEGLIBLE MEDIUM HOH HGH e 4 6 ကက 4 4 - 6 ကက CONSEQUENCE FATALITY MAJOR MINOR MINOR MAJOR MAJOR MINOR MINOR MINOR 322 m ოო ოო m 0 10 HAZARDS IN CONNECTION WITH PLACE OF OPERATION OF THE MACHINE VERY UNLIKELY VERY UNLIKELY LIKELIHOOD VERY LIKELY 3 UNLIKELY 2 LIKELY UNLIKELY UNLIKELY LIKELY LIKELY 4 VERY UN 1 VERY LIN 2 LIKELY LIKELY LIKELY HAZARDS GENERATED BY NEGLECTING ECONOMIC PRINCIPLES LIKELY 2 3 2 2 HAZARDS GENERATED BY MATERIALS AND SUBSTANCES Derator Competency: PLANT LICENCE NOT REQUIRED ROPPING HAMMER WHILE UNINSTALLING FROM TROLLEY NADVERTANT PLACEMENT OF FINGERS IN PIVOT POINT BACK INJURY (BENDING ADJUSTING BLADE POSITION) RRITATIONS TO THE SKIN DUE TO MATERIALS USED Manufacturer: WORK SMART EQUIPMENT HAZARDS GENERATED BY VIBRATION NHALATION OF MINOR DEBRE PARTICLES CRUSHING DUE TO -DROPPING THE MACHINE WHILE LIFTING Product Name: EASY HAMMER P5 NSTALATION/REMOVAL OF BLADE/MOIL HAZARDS GENERATED BY NOISE FROM BLADEMOIL WHILE OPERATING JETING THE MACHINE (BACK INJURY) STABBING/PUNCTURE DUE TO -PINCHING/CRUSHING DUE TO -DEAFNESS (LONG TERM USE) MECHANICAL HAZARDS HAZARD COMBINATION ELECTRICAL HAZARDS TRAIN FROM VIBRATION PERATION OF BLADE **EVERING LEADS**

Appendix Hazard Assessment

IS DEFINED BY THE WORK-COVER AUTHORITY AS THUS:

MINOR = REVERSIBLE INJURIES REQUIRING SEVERAL DAYS OFF NEGLIGIBLE = ABLE TO BE TREATED USING FIRST AID MAJOR = NORMALLY IRREVERSIBLE INJURIES FATALITY = INJURIES RESULT IN DEATH

THE AUSTRALIAN STANDARDS 4024.1.4/5 - 1996 "SAFEGUARDING OF MACHINERY - PART 1: GENERAL PRINCIPLES"

THE TERMS 'VERY LIKELY', 'LIKELY', 'UNLIKELY', 'VERY UNLIKELY' REFER TO PROBABILITY OF AN EVENT

THIS DOCUMENT HAS BEEN PREPARED ACCORDING TO GUIDELINES AND RECOMMENDATIONS FOUND IN:

1. 'HAZPAK' PRODUCED BY THE WORK-COVER AUTHORITY AND

THIS PRODUCT HAS BEEN DESIGNED AND MANUFACTURED AS A JACK HAMMER TROLLEY ONLY

INHERENTLY, AS THE CONSEQUENCE INCREASES IN SEVERITY, RISK INCREASES - EVEN WHEN LIKELIHOOD IS LOW HAPPENING, BUT ARE QUALITATIVE AND BASED ON BEST ESTIMATION DUE TO CONSULTATION AND EXPERIENCE.

RISK LEVEL IS DETERMINED USING THE 'RISK TABLE' AS SUGGESTED IN 'HAZPAK'.

Appendix D – Sales and Spares

For sales and spare parts please refer to your local distributor below.



SERVICE & PART ORDERING

For service and ordering parts, please call **AUS:** 1300 795 953 or +61 2 9460 8071

USA: 407-446-1996

EUROPE: +31 (0)6 24881203 or +31 (0)6 50841849

Or your nearest MAKINEX distributor

We have very knowledgeable, experienced staff to assist you with help and advice.

Appendix E – Jackhammer Manual

instructions.		,	•

Refer to your Jack Hammer manual for safety and operation

