



**Cap**

impact resistant, robust

**Arrangement of motor**

vertical – dust is kept away, durable

**Speed regulation**

adaptation of speed (EBS 125.4 RO)

**Dust guard**

foldable front edge to get to the edge of the working area

**Brush rim**

protection against dust emission

**Vibration damping**

splitting between motor and handle (patented) – efficient vibration absorption, protects the wrists of the user, better grinding performance

**Vacuum cleaner connection**

für dust extraction



**FEATURES OF CONCRETE GRINDERS**

The EIBENSTOCK concrete grinder sets the standards in terms of their handiness. The special parallel grip design provides the user with numerous benefits including even distribution of pressure on the disc, even overhead. The use of a vacuum cleaner with the dusthood ensures a clean working environment, but also prolongs the lifetime of the machine.




**BACK PROTECTION SYSTEM**

Ergonomics in Construction

**Relaxed working in upright posture**

**Carriage adjustable in height – better grinding result**

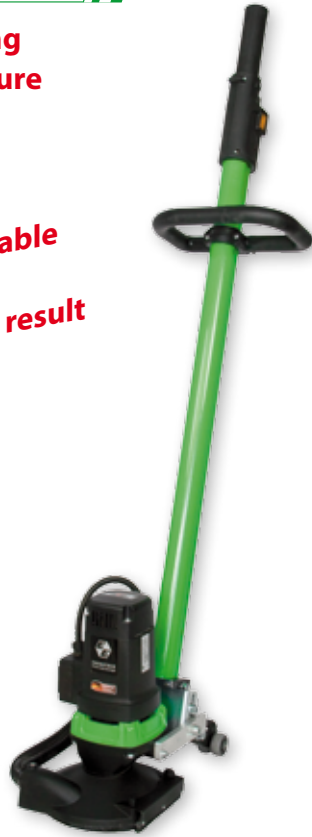

**Concrete grinder EBS 180 F**

**With floor guiding device for medium sized surfaces**

**USE:**

- Grinding and smoothing of surfaces
- Removing of residual mud, plaster and coatings
- Preparing of surfaces, e.g. for tile renovation
- Concrete, screed, tile adhesive, natural stone, mortar, paint, coatings, carpet adhesive – with corresponding grinding wheels (accessories)

**FEATURES:**

- Powerful 2500 W motor
- Electronic – soft start, temperature control and over current cut-off
- Segment on the dust-guard detachable – for grinding directly to the edge of the work area (no laborious reworking, saves time and costs)
- Brush rim – high suction power for dust-free working by connecting an industrial vacuum cleaner (accessory) to the 35 mm nozzle
- Tilt-adjustable floor guiding device and additional handle adjustable in height – optimal adjustment to the body height of the operator for a comfortable guiding

**Ø 180**



SPECIFICATIONS	EBS 180 F
Power input	2500 W
Rated voltage	230 V ~
No-load speed	8500 rpm
Disc diameter	180 mm
Spindle connection	Ø 22.2 mm
Weight	10.5 kg
Order no.	0634H000
Supplied	in a box incl. diamond-grinding wheel (concrete) and assembly tools

for every surface: PCD-grinding wheel with monobloc diamonds – high removal rate and long lasting (accessory)

