
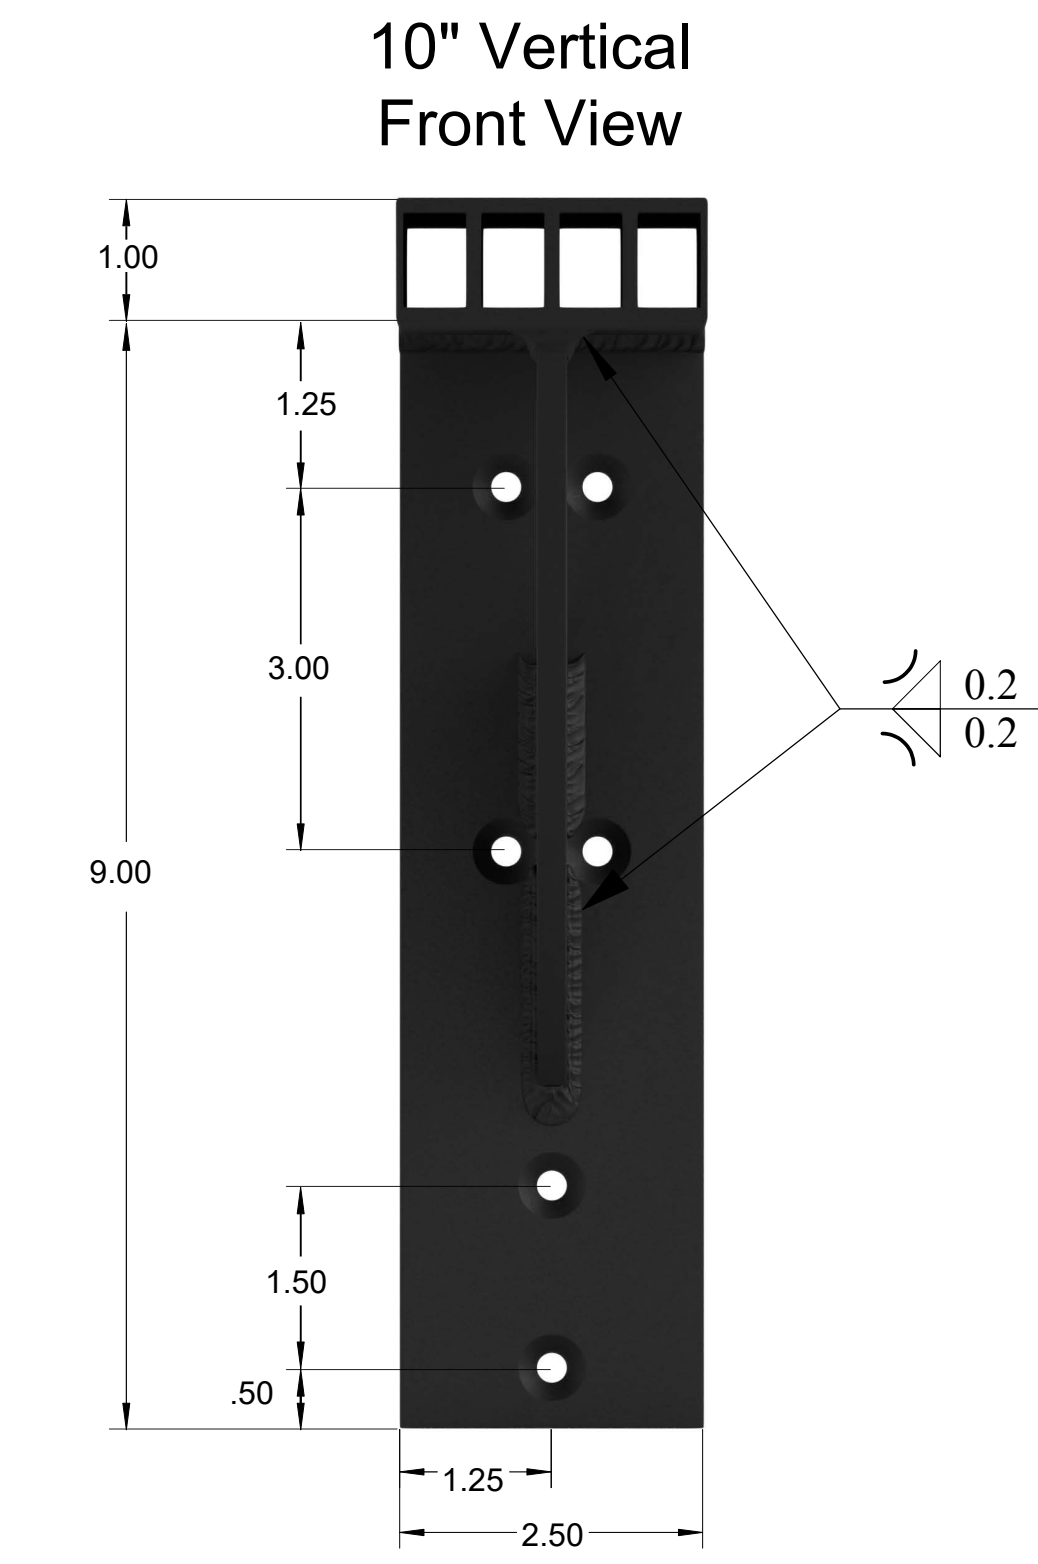
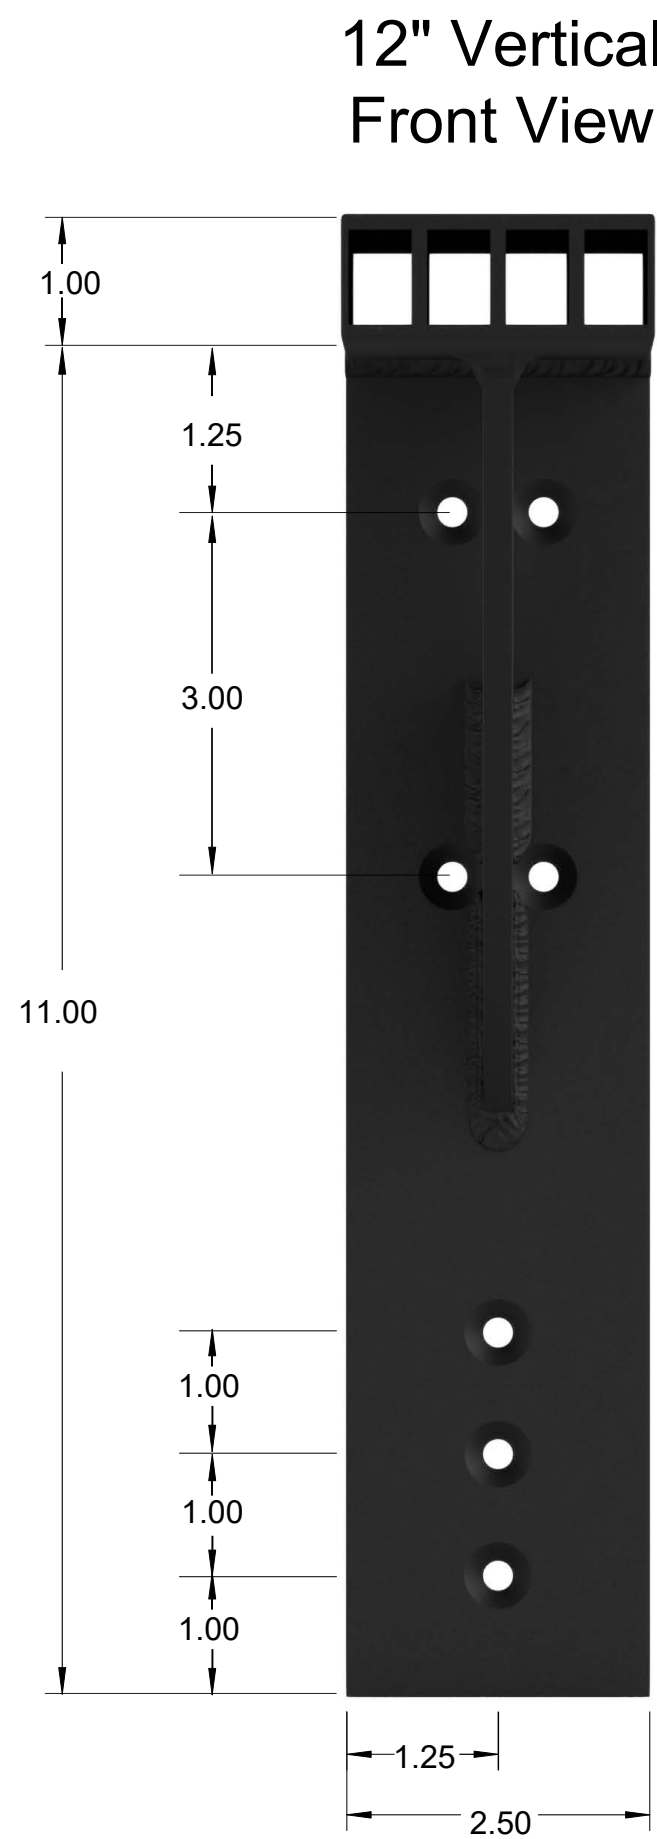
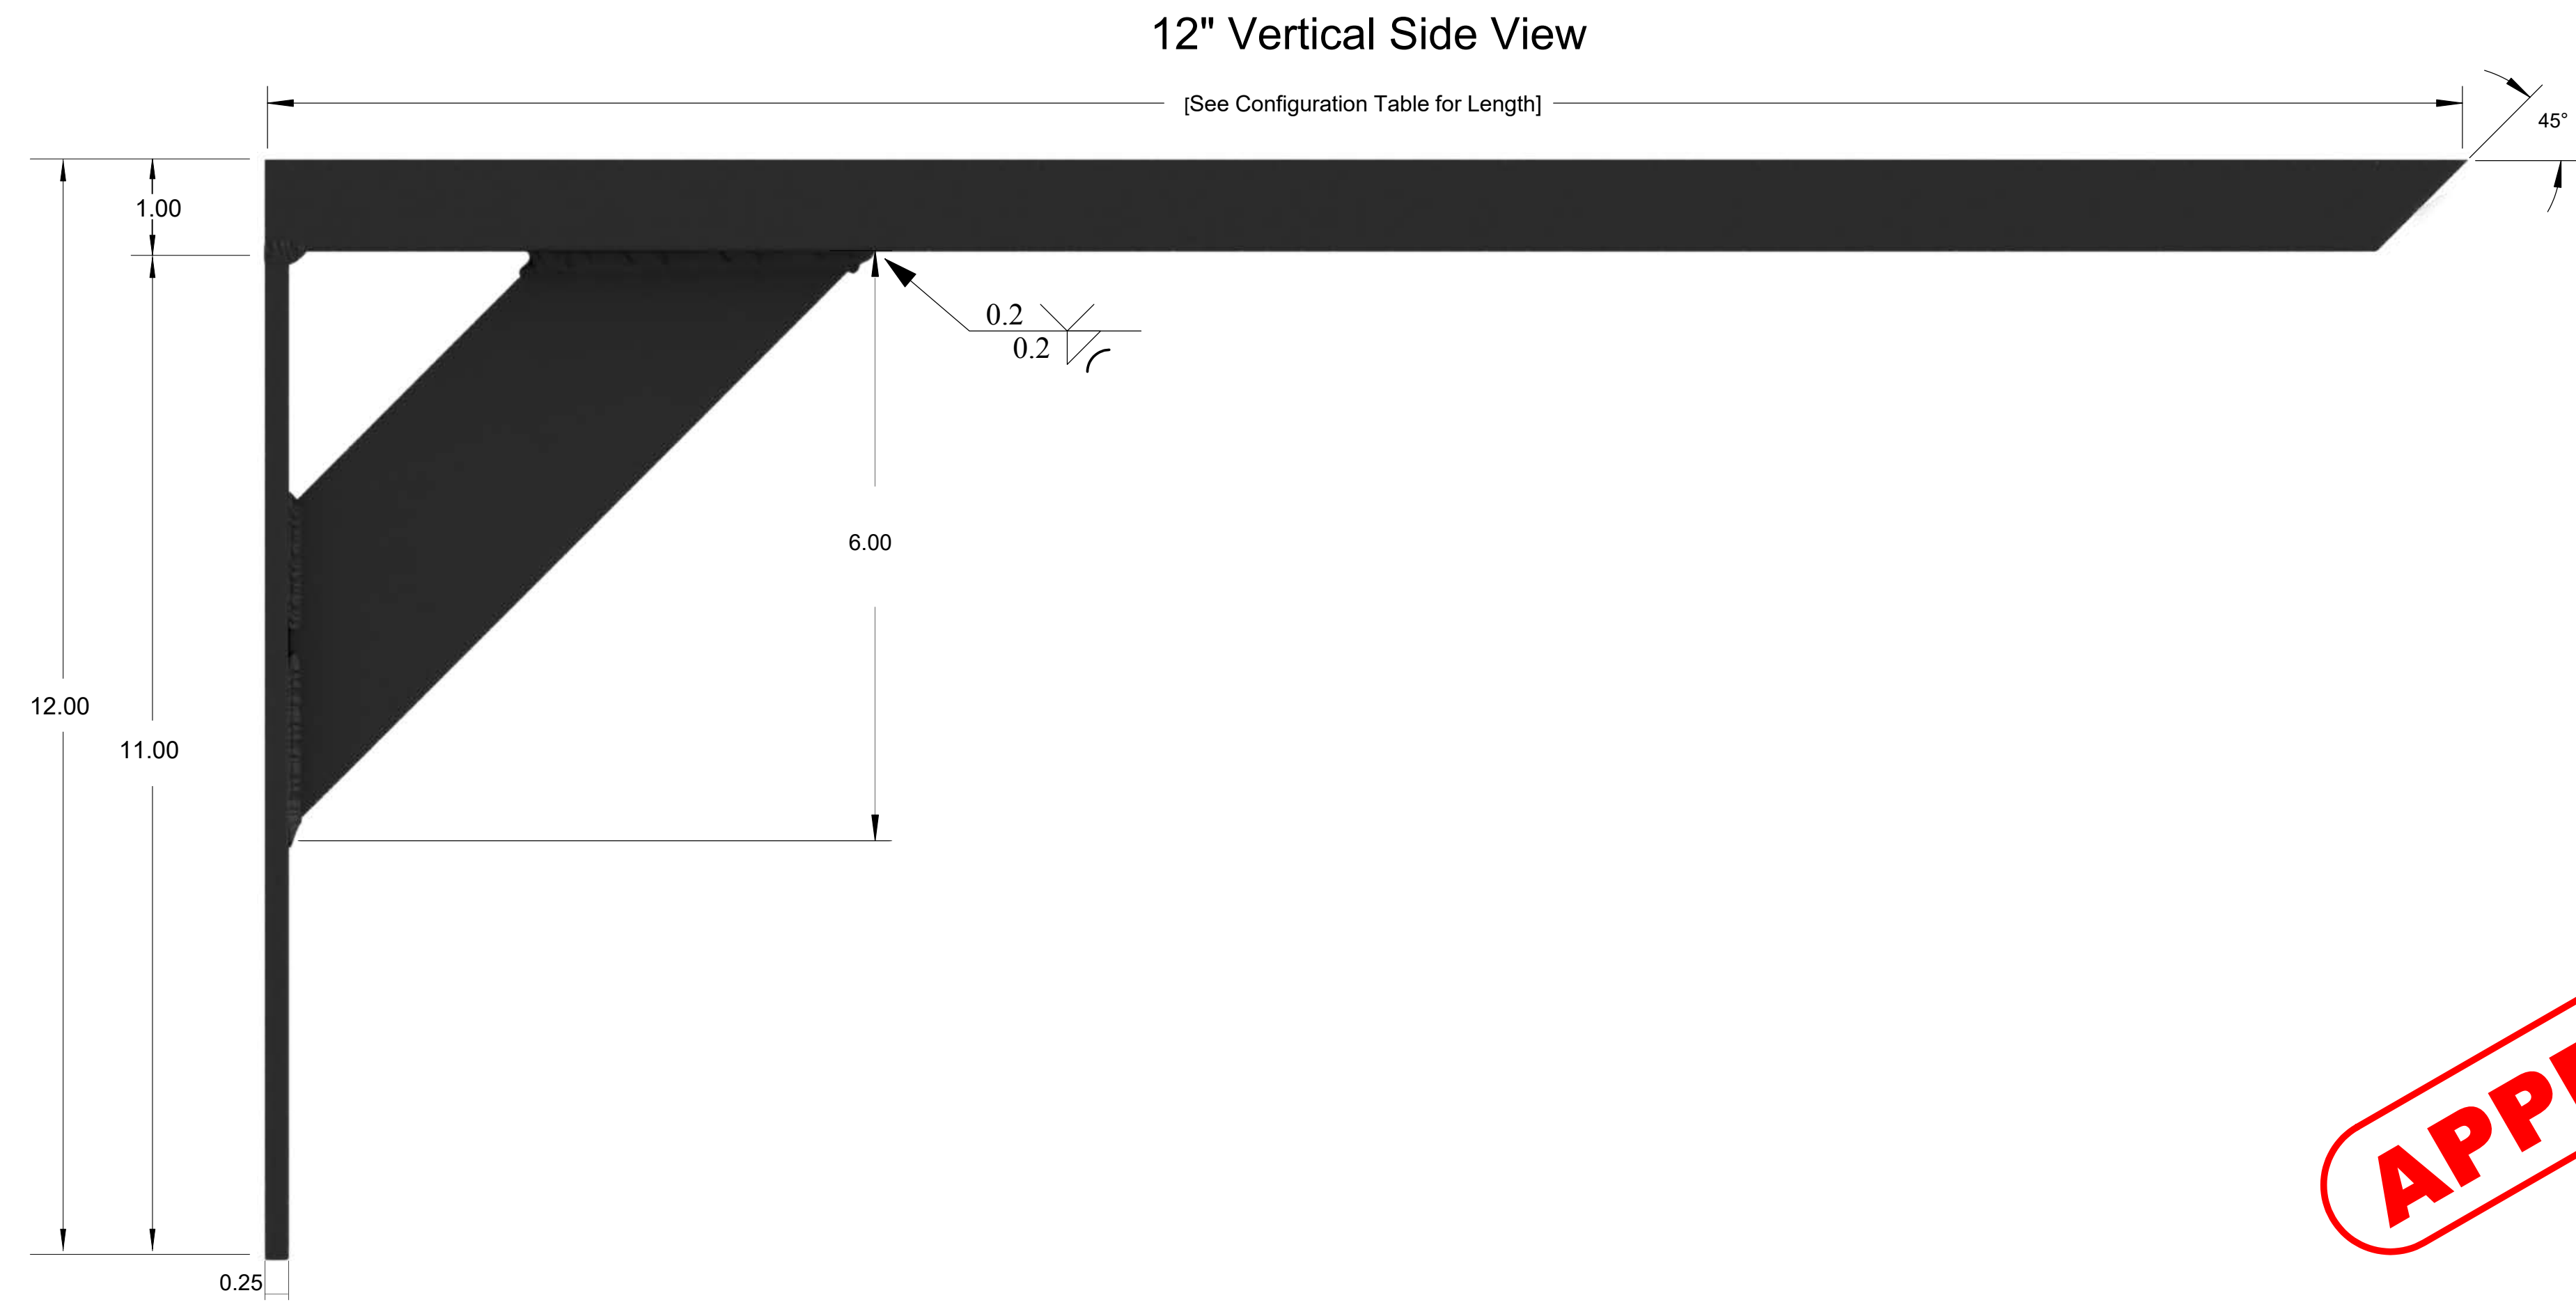



- NOTES: UNLESS OTHERWISE SPECIFIED
1. ALL DIMENSIONS ARE THEORETICALLY SHARP.
 2. REMOVE BURRS AND BREAK ALL SHARP EDGES .03 MAX.
 3. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE STATED.
 4. PARTS SHALL BE FREE OF GREASE AND CUTTING FLUID.
 5. COATED WITH A BLACK RUST INHIBITOR FINISH.

Configuration Table		
Model	Length	Height
LSI-1010	10"	10"
LSI-1210	12"	10"
LSI-1410	14"	10"
LSI-1610	16"	10"
LSI-1810	18"	10"
LSI-2010	20"	10"
LSI-2210	22"	10"
LSI-2412	24"	12"
LSI-2612	26"	12"
LSI-2812	28"	12"
LSI-3012	30"	12"
LSI-3212	32"	12"

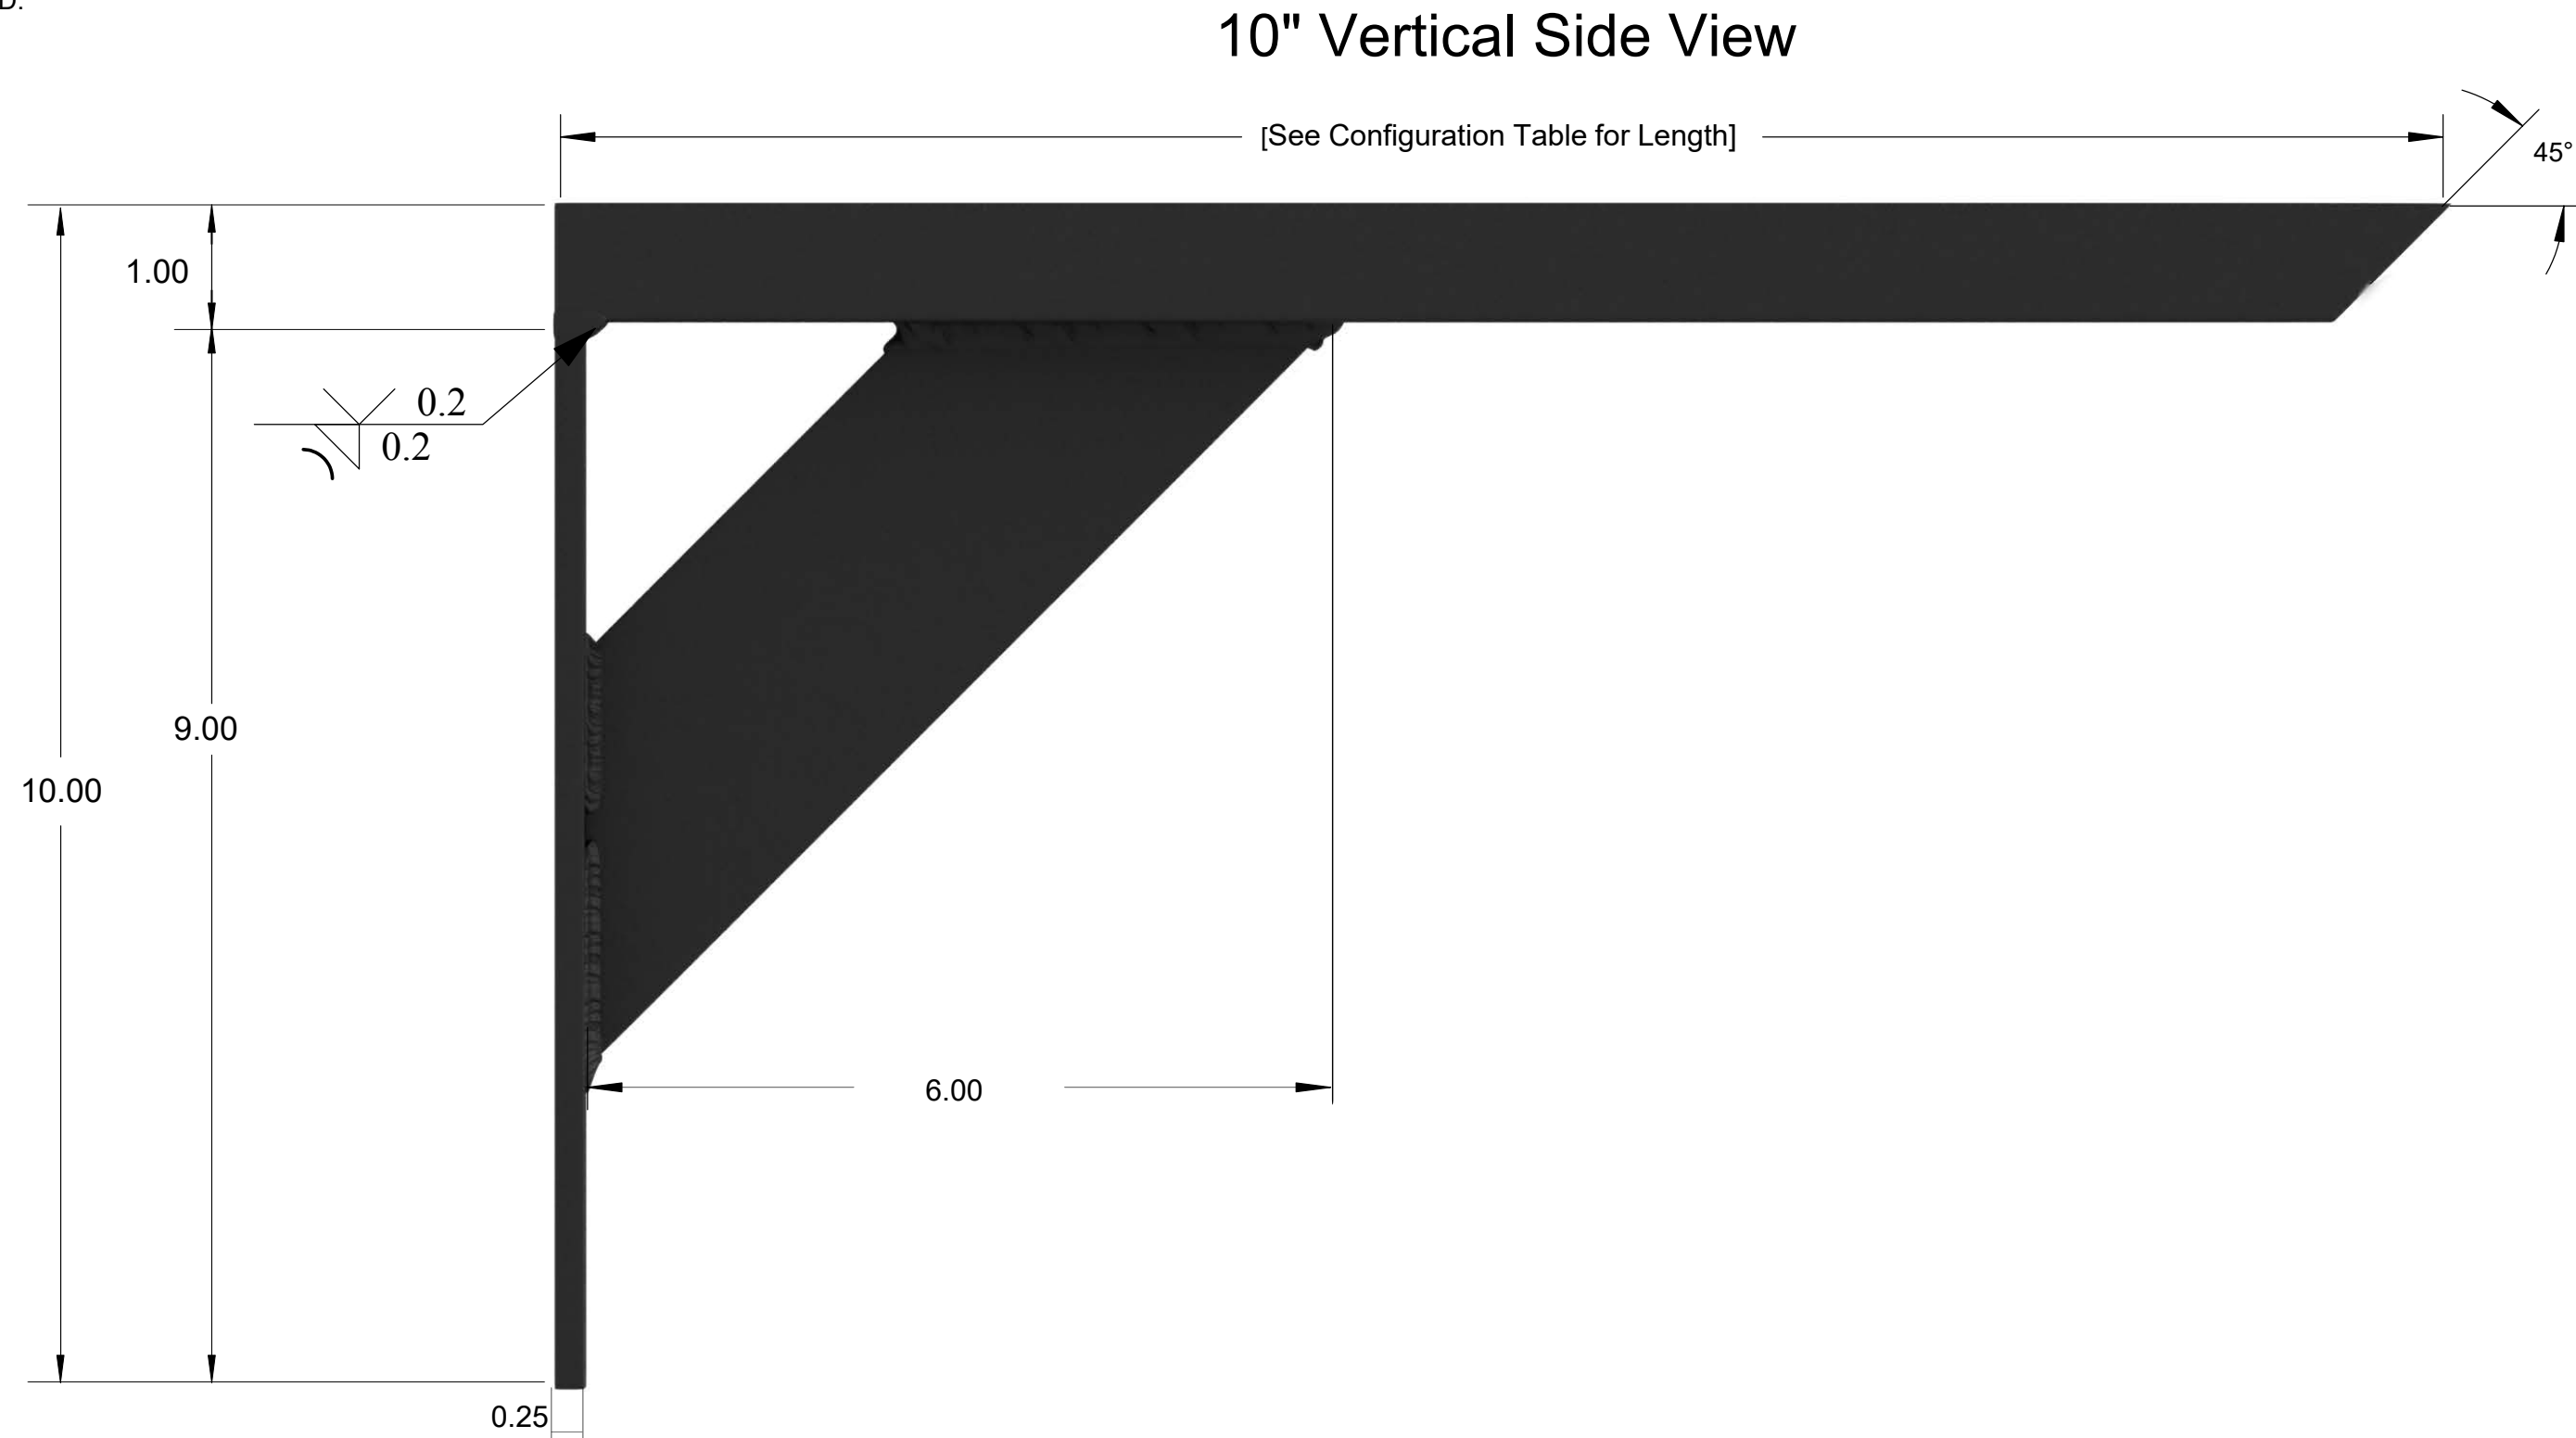

APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ENGINEER				
TOLERANCES ARE:		ENGINEER				
ANGLES		ENGINEER				
X = .1 XX* = 1°		CHECKED				
.XX = .01		DRAWN	SMR	01/08/21		TITLE
XXX = .005		MANAGER APPROVAL				Large Shelf, Industrial Support
INTERPRET DRAWINGS IN ACCORDANCE WITH:		THE INFORMATION ON THIS DRAWING IS PROPRIETARY AND SHALL NOT BE DISCLOSED, USED OR DUPLICATED FOR PROCUREMENT OR MANUFACTURING PURPOSES WITHOUT THE EXPRESS WRITTEN CONSENT OF THE ORIGINAL GRANITE BRACKET.		SIZE	CAGE CODE	DWG NO
ASME Y14.100 ENGINEERING DRAWING PRACTICES				D		LSI-xxxx
ASME Y14.38 ABBREVIATIONS				SCALE		REV
ASME Y14.5 DIMENSIONING AND TOLERANCING						A
ASME Y14.6 SCREW THREAD REPRESENTATION						
AWS A2.4 WELDING SYMBOLS						
IEEE STD 315 SYMBOLS FOR ELECTRICAL AND ELECTRONIC DIAGRAMS						
						SHEET
						1 of 1

REVISION STATUS - EACH SHEET IS MARKED WITH ITS REVISION				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A		01/08/21	